

AUTOMOTIVE ENGINE | AUTOMOTIVE DRIVELINE | HEAVY DUTY ENGINE | HEAVY DUTY DRIVELINE | HYDRAULIC | GEAR OILS | GREASES | INDUSTRIAL LUBRICANTS | ANTIFREEZE

HEAVY DUTY NATURAL GAS ENGINE OIL

Performance Plus® Heavy Duty Natural Gas Engine Oil is formulated using high-quality, superior base oil and advanced, performance additives designed to provide excellent oxidation and thermal stability to withstand pressure under the most severe operating conditions (low and high temperatures). It is recommended for use in Compressed Natural Gas (CNG) or Liquefied Natural Gas (LNG) trucks and buses demanding reliable protection, sludge and deposit control, engine cleanliness, and it is approved and licensed to meet or exceed the latest Cummins CES 20074 specification. Performance and Protection are the foundation of all Performance Plus products which is why they are designed to maintain pow er, perform, and protect engines in harsh driving conditions.

PERFORMANCE PLUS PROPERTIES	
SAE Viscosity Grade	15W-40
Kinematic Viscosity cSt @ 40°C cSt @ 100°C	113.7 15.9
Viscosity Index	149
CCS Viscosity cP @ -20°C	4,500
MRV Viscosity cP @ -25°C	14,900
TBN	5.9
Evaporative Loss, NOACK, wt%	6
Specific Gravity 15.6°C (60°F)	0.860
Flash Point, °C (°F)	240 (464)
Pour Point, °C (°F)	-39 (-38)
Color (ASTM)	L 3.0
Sulfated Ash, wt%	0.59

Approvals and Specifications

Performance Plus[®] Heavy Duty Natural Gas Engine Oil has been formally approved to meet the following specifications:

Cummins CES 20074

Since Performance Plus Heavy Duty Natural Gas Engine Oils meet and can exceed the latest stringent OEM requirements, they are also suitable for use in the follow ing brands where the above specification is called for:

Detroit Diesel Blue Bird Thomas Collins StarCraft Hino Crow n Liberty Daimler Caterpillar Komatsu Mitsubishi	Navistar MAN Scania Hyundai Iveco Isuzu Mercedes-Benz Volvo Renault John Deere Toyota Hitachi
Terex	Liebherr

Note: Values shown above are representative of current production and may vary within modest ranges



AUTOMOTIVE ENGINE | AUTOMOTIVE DRIVELINE | HEAVY DUTY ENGINE | HEAVY DUTY DRIVELINE | HYDRAULIC | GEAR OILS | GREASES | INDUSTRIAL LUBRICANTS | ANTIFREEZE

HEAVY DUTY NATURAL GAS ENGINE OIL


Features and Benefits: Today's fleets (buses and trucks) demand performance, protection and power and Performance Plus Heavy Duty Natural Gas Engine Oil is designed to meet or exceed these demands. Tested, proven, and trusted quality are why those demanding the best turn to Performance Plus. In addition to performance and protection, Performance Plus Heavy Duty Natural Gas Engine Oil offers:

Superior performance over a wide temperature range Excellent anti-wear characteristics


- Excellent anti-wear characteristics
- Provides protection at low start up conditions
- Thermally stable with low ash percentage
- Formulated to resist corrosion over long service intervals

Extending service life in extreme conditions Preventing undue wear and scuffing of pistons and liners Eliminating undue wear at cold engine start Performing at high engine temperatures and RPMs Protecting key engine components and prolonging life

Proven and Trusted: The foundation of all Performance Plus products is the tested, proven and trusted base oil which exceeds the performance of many of the major oil refiners. Our finished lubricants start at a higher level than the competition due to our formulated blend of high-quality base oils and additives.

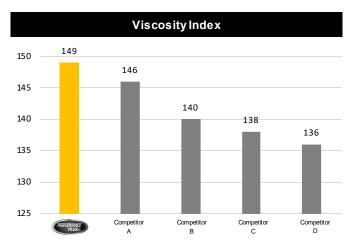

Performance Plus[®] has a superior Viscosity Index, enhancing performance over a wider temperature range than the leading competitors, protecting engines from wear at extreme high and low temperature environments.

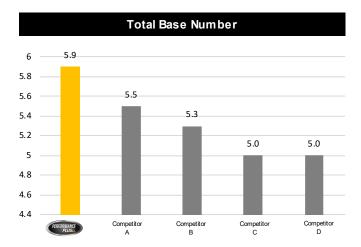

Performance Plus[®] contains state of the art additives, with industry leading technology. The superior Total Base Number of Performance Plus[®] indicates a greater corrosion protection over time extending the life of engine components.

Health and Safety: Information detailing health and safety can be found in the corresponding Safety Data Sheet on the Performance Plus website. Performance Plus products contain petroleum distillates and are not likely to pose any significant health or safety hazards. Gloves should be used to avoid any contact - should there be contact with skin, washing with soap and water is advised. If ingested, call a poison center or doctor - do not induce vomiting.

Storage: Performance Plus products should not be stored where the temperatures are above 140° F (60° C) or near sparks and fames. Products should be stored under cover and away from the reach of children. In case where drums cannot be under cover, they should be laid horizontally to avoid any potential contaminants.

Disposal: All efforts should be made to protect the environment. Please properly dispose of used motor oil and lubricants. Should you need any assistance please contact your sales representative for information on how Safety-Kleen's used motor oil collection services.

For additional questions, please contact your Performance Plus® Products Sales Representative.

Rev.9/23